

**BROOKS**  
EQUIPMENT



**SOLID TO SUCCEED**



**SCISSOR LIFTS**  
**XG1218RT**

Product Specifications

OPERATING WEIGHT  
**4,400 kg**

RATED POWER  
**18.2 kW/3000 rpm**

WORKING HEIGHT  
**12 m**

ENGINE  
**Kubota**

## SPECIFICATIONS


XCMG's XG1218RT is a rough terrain scissor lift, built solid to succeed.

## FEATURES

- 4 Driving Wheels
- 2 Steering Wheels
- 40% theoretical gradeability
- Outrigger levelling system
- Both platform and ground control panel with emergency stop button
- High altitude automatic limit travel protection
- Foam-filled rough terrain tires
- Hourmeter record
- Tilt alarm
- Lift and lower alarm
- Horn
- Drive alarm
- Axle balance system
- Overload alarm
- 12V DC emergency power
- Kubota Euro stage V emission

## DIMENSIONS

A	Length	3835 mm
B	Width	1760 mm
C	Height (platform folded)	2580 (1830) mm
D	Platform length	2880 mm
E	Platform width	1520 mm
F	Wheelbase	2290 mm

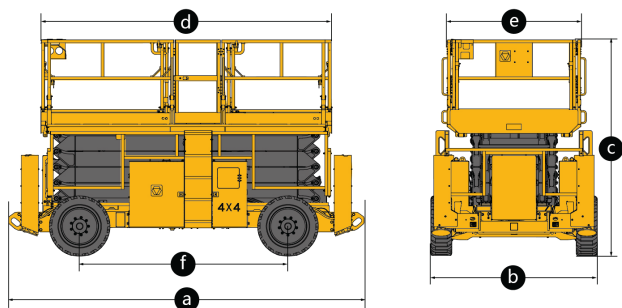

## KEY SPECIFICATIONS

Lift capacity	455 kg
Lift capacity of auxiliary platform	135 kg
Occupant Capacity (indoor/outdoor)	4/2
Working height	12 m
Platform height	10 m
Length of auxiliary platform	1430 mm
Length of platform (main and sub)	4310 mm
Ground clearance	200 mm
Turning radius	4.8 m
Drive speed (retracted/extended)	5/0.4 km/h
Lift/lower time	38/46 s
Gradeability	40%
Tilt alarm (side/ forward and backward)	2/3°
Power source	Kubota
Rated power	18.2/3000 kW/rpm
Tires	26x12
Fuel tank	48 L
Hydraulic tank	70 L
Weight	4400 kg



☎ 1300 BROOKS (276 657)

@ sales@brooksequipment.com.au

🌐 www.brooksequipment.com.au