

# STRONG AND SPACIOUS



## SCISSOR LIFTS

# XG1523RT

Product Specifications

OPERATING WEIGHT  
**7,250 kg**

RATED POWER  
**36.8 kW/2700 rpm**

WORKING HEIGHT  
**15 m**

ENGINE  
**Kubota V2403**

## SPECIFICATIONS


The XCMG XG1523RT features a high load capacity and spacious platform, ideal for multi-person jobs and large applications.

### FEATURES

- 15m working height
- Up to 680kg lift capacity
- 4WD
- 40% theoretical gradeability
- Outrigger levelling system
- Both platform and ground control panel with emergency stop button
- 4-wheel multi-disc brakes
- Solid rough terrain tires
- Hourmetre record
- Tilt alarm
- Lift and lower alarm
- Horn
- Dual flashing beacons
- Drive alarm
- Overload alarm
- 12V DC emergency power
- Kubota Euro stage V emission
- 115L hydraulic oil tank
- 115L diesel fuel tank

### DIMENSIONS

A	Length (without ladder)	4860 (3980) mm
B	Width	2286 mm
C	Height (platform folded)	2950 (2290) mm
D	Platform length	3980 mm
E	Platform width	1830 mm
F	Wheelbase	2850 mm

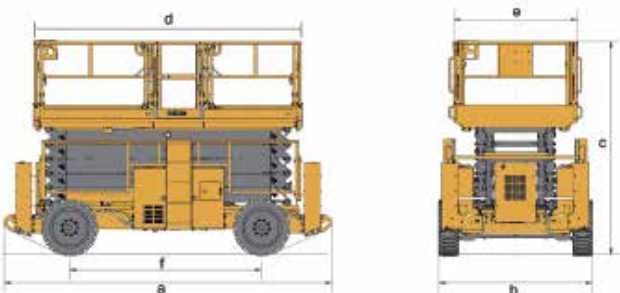

### KEY SPECIFICATIONS

Lift capacity	680 kg
Lift capacity of auxiliary platform	230 kg
Occupant Capacity (indoor/outdoor)	7
Working height	15 m
Platform height	13 m
Length of auxiliary platform	1450/1140 mm
Length of platform (main and sub)	253 mm
Ground clearance	2.5/5.6 mm
Turning radius	6.1 m
Drive speed (retracted/extended)	1.1 km/h
Lift/lower time	45/45 s
Gradeability	40%
Tilt alarm (side/ forward and backward)	2/3°
Power source	Kubota V2403
Rated power	36.8/2700 kW/rpm
Tires	33 x 12-20
Fuel tank	115 L
Hydraulic tank	115 L
Weight	7250 kg



☎ 1300 BROOKS (276 657)

@ sales@brooksequipment.com.au

🌐 www.brooksequipment.com.au