

CONVENIENTLY COMPACT



SCISSOR LIFTS **XG1823RT**

Product Specifications

OPERATING WEIGHT
8,000 kg

RATED POWER
36.8 kW/2700 rpm

WORKING HEIGHT
18.1 m

ENGINE
Kubota V2403

SPECIFICATIONS


XCMG's XG1823RT is a rough terrain scissor lift with a compact design for convenient transportation. A lowered centre of gravity allows for greater energy-efficiency and stability. Fitted with off-road tyres and an axle balancing system, this machine is ready to tackle the more rigorous jobsites.

FEATURES

- 18.1m working height
- Up to 680kg lift capacity
- 4 driving wheels
- 40% theoretical gradeability
- Outrigger levelling system
- Both platform and ground control panel with emergency stop button
- 4-wheel multi-disc brakes
- Solid rough terrain tires
- Hourmeter record
- Tilt alarm
- Lift and lower alarm
- Horn
- Dual flashing beacons
- Drive alarm
- Overload alarm
- 12V DC emergency power
- Kubota Euro stage V emission
- 115L hydraulic oil tank
- 115L diesel fuel tank

DIMENSIONS

A	Length (without ladder)	4860 (3980) mm
B	Width	2286 mm
C	Height (platform folded)	3170 (2510) mm
D	Platform length	3980 mm
E	Platform width	1830 mm
F	Wheelbase	2850 mm

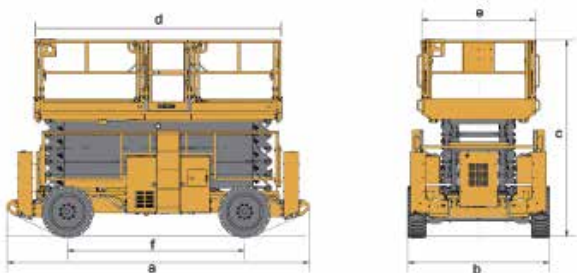

KEY SPECIFICATIONS

Lift capacity	680 kg
Lift capacity of auxiliary platform	230 kg
Occupant Capacity	4
Working height	18.1 m
Platform height	16.1 m
Length of auxiliary platform	1450/1140 mm
Ground clearance	253 mm
Turning radius (inside/outside)	2.5/5.6 m
Drive speed (retracted/extended)	6.1/ 1.1 km/h
Lift/lower time	55/55 s
Gradeability	40%
Tilt alarm (side/ forward and backward)	2/3°
Power source	Kubota V2403
Rated power	36.8/2700 kW/rpm
Tires	33 x 12-20
Fuel tank	115 L
Hydraulic tank	115 L
Weight	8000 kg



☎ 1300 BROOKS (276 657)

@ sales@brooksequipment.com.au

🌐 www.brooksequipment.com.au